THE General Radio EXPERIMENTER

VOLUME XX No. 12 MAY, 1946
Copyright, 1946, General Radio Company, Cambridge, Mass., U. S. A.

ELECTRICAL MEASUREMENTS AND THEIR INDUSTRIAL APPLICATIONS

Also
IN THIS ISSUE

Page
D AND Q 5
NEW ADDRESS FOR WEST-COAST OFFICE . . 8

V-5 SERIES VARIACS — NEW, IMPROVED MODELS REPLACE 200-C SERIES

● **FOR MANY YEARS** the 200-C Variac has been our most popular single instrument. We might, perhaps, have chosen to let well enough alone and continued 200-C sales indefinitely. Yet, inevitably, such a course collides with the hard fact that failure to progress is to retrogress.

Mere change, however, is not progress. In supplanting the 200-C with the V-5 we have made every effort to incorporate features that are truly improvements. Careful consideration has been given to each factor, including greater convenience and utility, reliability, improved appearance, and increased value.

For your convenience the V-5 has the new General Radio Unit Brush,

FIGURE 1. The old and the new. At the right is shown the new TYPE V-5MT, at the left the old TYPE 200-CM.

FIGURE 2. "The new General Radio unit brush . . . can be changed without tools."

which can be changed (Figure 2) without tools. The V-5 Brush has a further advantage in that its low sprung weight reduces hammering and arcing under vibration conditions, injurious to both brush and winding, and it is designed to prevent contact of the brush holder with windings and consequent short-circuit damage. Proper brush pressure is assured by the use of an accurate coil spring, which in turn is electrically shunted so that the spring is not subjected to load current. Brush travel is limited by a resilient stop.

No longer is it necessary to take practically the whole moving assembly apart to reverse a shaft in changing from panel to table mounting, or vice versa. A single screw (Figure 3) loosens the shaft for removal or tightens it in assembly. Brush adjustment and the resilient stop setting are unaffected by shaft reversal.

FIGURE 3. "A single screw loosens the shaft for removal or tightens it in assembly."

Variacs have to be carried, and knobs are poor and unreliable handles, relying, as they do, on set screws. Figure 4 shows the V-5 cord with molded-on plug which, wound about the Variac and plugged into the Variac outlet, serves as an excellent carrying strap.

Rubber feet, that squeeze back into their sockets for panel mounting, make V-5 Variacs considerate of your bench, table, or desk, and provide sufficient friction to prevent slipping even on smooth surfaces. Rounded contours, devoid of sharp or irregular projections, still further protect against damage to adjacent objects (including hands and feet) in the inevitable bumps and drops that occur in the life of an instrument.

Dials with BIG calibration figures and additional scale points make V-5 Variacs easy to read and to reset. Clockwise rotation to increase output is the rule.

Terminals have both solder and screw connection facilities, are easy to get at, and logically arranged. Barriers reduce the hazard of short-circuits from loose strands. A circuit diagram, integral with the terminal strip, identifies each lead and indicates normal voltages (not turns, as heretofore) between leads as a wiring aid. Extra

terminals (6 and 7) greatly extend the usefulness of the V-5 Series Variacs when used with supplementary transformers. The terminal strip itself is a high-impact-strength molding, protected by a metal, fiber-lined cover to reduce further the possibility of breakage. If, however, you are ingenious enough to break it, the only tool required for replacement is a screw driver.

Next to a zipper, the V-5 case and terminal cover assembly method is the fastest. Two screws only are required for the assembly of the two pieces to the base. A cover band, carrying integral rivets, cooperates with the screws to form a secure yet rapid assembly. Type numbers distinguishing cased and uncased models are automatically formed by registering tabs on the parts.

A new, heavy-duty switch breaks both sides of the line in mounted V-5 models. Provision is made for polarity indication for use with grounded loads, which, while seldom recommended, are sometimes required.

General Radio Company has never featured appearance for appearance's sake. Yet V-5 Variacs have a distinctly modern look, naturally and functionally derived. Curves instead of angles result from the maintenance of fixed clearances with a minimum of enclosing material. The top "band" is used to position the perforated cover side when it is welded to the top ring. The bottom "band" which forms the other termination of the cylindrical portion of the enclosure carries fastening rivets as previously explained. Both are functional. The flush dial is a perfectly logical method of conserving space and material, as it is eminently suitable to form a portion of the enclosure. The perforations were deliberately chosen to accent the cylindrical nature of the design. Perforations were required in any event; better attractive than not.

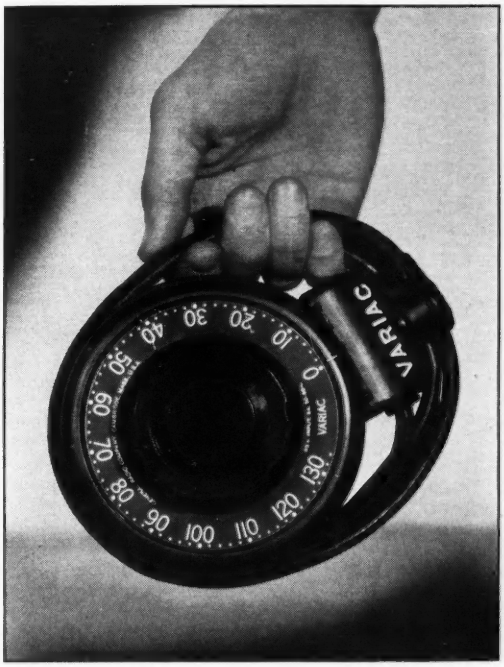

FIGURE 4. ". . . the V-5 cord with molded-on plug which, wound about the Variac and plugged into the Variac outlet, serves as an excellent carrying strap."

The finish selected for V-5 Variacs is an exceptionally durable matte baking lacquer. Its lack of high lights prevents distraction of attention and preserves the unity of the basic design. The use of aluminum for structural parts with attendant corrosion resistance is further enhanced by this wear-resistant and attractive covering.

Last but not least, don't overlook the fact that V-5 Variacs deliver 25 per cent more KVA per pound than equivalent 200-C models. Grain-oriented strip cores permit reductions in both iron and copper for comparable ratings. Aluminum instead of zinc and steel in structural parts furthers this weight reduction.

— GILBERT SMILEY

SPECIFICATIONS

Note: Models are designated by type number. The basic VARIACS, V-5 (for 115-volt input) and V-5H (for 230-volt input), are supplied with terminal strip, but without case, terminal box, switch, convenience outlet, and cord. Models V-5M and V-5HM include the case. Models V-5MT and V-5HMT are complete mounted models with case, terminal box, switch, cord, and outlet.

Dials: Dials are engraved for overvoltage connection (135 or 270 volts maximum). Special dials are available for 115- and 230-volt maximum output. Dial is reversible, one side for table mounting, the other for panel.

Type	*V-5*	*V-5M*	*V-5MT*	*V-5H*	*V-5HM*	*V-5HMT*
Load Rating (KVA)	.862	.862	.862	.575	.575	.575
Input Voltage	115	115	115	230 or 115	230 or 115	230 or 115
Output Voltage (Zero to)	135 115	135 115	135 115	270 230	270 230	270 230
Rated Current (Amperes)	5	5	5	2 1*	2 1*	2 1*
Maximum Current (Amperes)	7.5	7.5	7.5	2.5	2.5	2.5
No-Load Loss — 60 ∽ (Watts)	9	9	9	9	9	9
Driving Torque (Inch — Ounces)	30–50	30–50	30–50	30–50	30–50	30–50
Overall Height for Table Mounting (Inches)	5	5	5	5	5	5
Maximum Panel Thickness (Inches)	3/8	3/8	3/8	3/8	3/8	3/8
Depth behind Panel (Inches)	$3^{21}/_{32}$	$3^{21}/_{32}$	$3^{21}/_{32}$	$3^{21}/_{32}$	$3^{21}/_{32}$	$3^{21}/_{32}$
Diameter of Variac Cylinder (Inches)	$4^{15}/_{16}$	$4^{15}/_{16}$	$4^{15}/_{16}$	$4^{15}/_{16}$	$4^{15}/_{16}$	$4^{15}/_{16}$
Add for Terminals (Inches)	9/16	9/16	$1^{15}/_{16}$	9/16	9/16	$1^{15}/_{16}$
Net Weight (Pounds)	$6^3/_4$	7	$7^5/_8$	$6^1/_2$	$6^3/_4$	$7^3/_8$
Code Word	COBRA	COPAL	CORAL	CULPA	CUMIN	CUPID
Price	$16.50	$17.50	$20.00	$21.50	$22.50	$25.00

*With 115-volt input applied across half the winding.

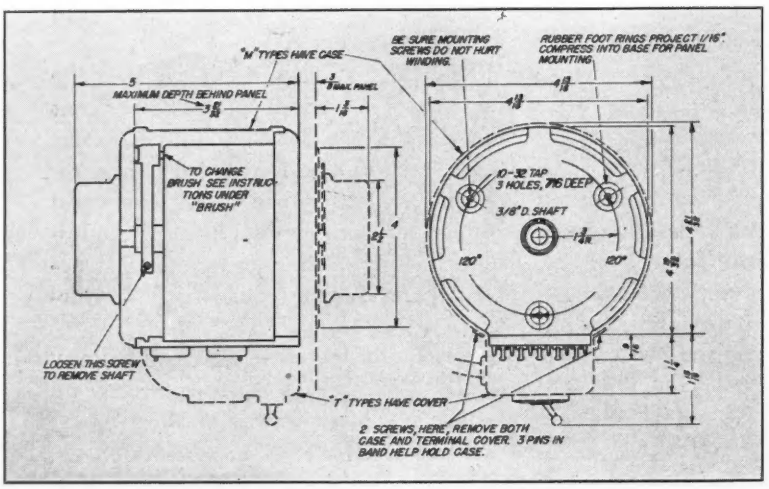
"M" TYPES HAVE CASE
BE SURE MOUNTING SCREWS DO NOT HURT WINDING.
RUBBER FOOT RINGS PROJECT 1/16" COMPRESS INTO BASE FOR PANEL MOUNTING
MAXIMUM DEPTH BEHIND PANEL
TO CHANGE BRUSH SEE INSTRUCTIONS UNDER "BRUSH"
10-32 TAP 3 HOLES, 7/16 DEEP
3/8" D. SHAFT
120°
120°
LOOSEN THIS SCREW TO REMOVE SHAFT
"T" TYPES HAVE COVER
2 SCREWS, HERE, REMOVE BOTH CASE AND TERMINAL COVER. 3 PINS IN BAND HELP HOLD CASE.

FIGURE 5. Universal dimension drawing for the V-5 series of Variacs. The basic V-5 Variac is shown in full lines. The case (M) and the terminal-box cover (T) are shown dotted. The knob and dial in panel mounting position are also shown dotted.

D AND Q

● **THE POWER LOSSES** in both capacitors and inductors can be expressed in several different ways. In a perfect reactor the current either leads or lags the voltage by exactly 90° as shown in Figure 1. When power losses occur, the phase angle θ becomes less than 90° by an angle δ called the loss angle or phase defect angle, as shown in Figure 2. The power loss W is a direct function of this loss angle:

$$W = EI \cos\theta = EI \sin\delta \qquad (1)$$

where the trigonometric functions are defined as the power factor.

The reactor can be represented either as a parallel or series circuit,[1] as shown in Figures 3 and 4. For these circuits, the power loss is

$$W = \frac{E^2}{R_p} = E^2G = I^2R_s \qquad (2)$$

The ratio of parallel reactance and parallel resistance is called the dissipation factor D, while its reciprocal is called the storage factor Q.

$$D = \frac{1}{Q} = \frac{X_p}{R_p} = \frac{G}{B} = \frac{R_s}{X_s} \qquad (3)$$

Combining Equations (2) and (3)

$$W = \frac{E^2D}{X_p} = \frac{E^2}{QX_p} = I^2DX_s = \frac{I^2X_s}{Q} \qquad (4)$$

[1] Tuttle, W. N., "The Series and Parallel Components of Impedance," *General Radio Experimenter*, XX, 8, January, 1946.

FIGURE 1 (*left*). **Relation between current and voltage for a perfect reactor. Phase angle θ is 90°.**
FIGURE 2 (*right*). **Relation between current and voltage for a reactor having losses. Phase angle θ differs from 90° by loss angle.**

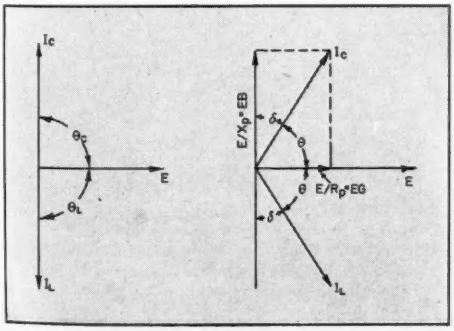

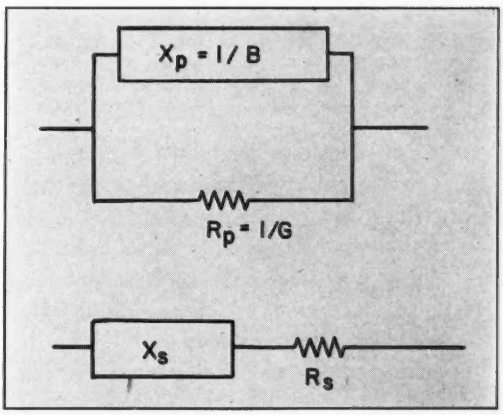

FIGURE 3 (*above*). **Parallel components of a reactor.**
FIGURE 4 (*below*). **Series components of a reactor.**

The names of these factors are appropriate, for dissipation factor D is proportional to the power dissipated in the resistive elements, and storage factor Q is proportional to the power stored in the reactive elements. The relation of these factors to the phase and loss angles as shown in Figure 2 is

$$D = \frac{1}{Q} = \cot\theta = \tan\delta \qquad (5)$$

Dissipation factor and power factor differ by less than 1% when their values are less than 0.15.

Dissipation factor and storage factor are used as figures of merit, or quality factors, for capacitors and inductors. It has become customary to use dissipation factor D for capacitors and storage factor Q for inductors. There are, however, many reasons for using dissipation factor exclusively. In the first place, any power loss is a defect, a departure from perfection, and the factor that measures it should vary directly with it and go to zero for zero loss. Dissipation factor meets this requirement and storage factor does not. Values for several types of capacitors are given in Table I.

TABLE I

Capacitors	*D*	*Q*
Paper, Ordinary	0.02	50
Paper, Quality	0.005	200
Mica, Ordinary	0.002	500
Mica, Quality	0.0005	2000
Polystyrene	0.0002	5000

It is sometimes urged that dissipation factor is awkward because it is a decimal, with several ciphers before the significant figure. To remedy this, dissipation factor has been expressed in per cent, as is customary for power factor when used for power transmission. This has led to endless confusion when it becomes necessary to state the accuracy of its measurement also in per cent. For this reason, it is expressed as a ratio in all ASTM specifications and in all General Radio publications. There is only a slight gain in the number of figures required if storage factor Q is used instead, as is shown in Table I, and the ability to show accuracy by the number of significant figures is impaired.

In the second place, whenever there is more than one source of loss in a reactor, the dissipation factors representing such losses add directly to give the total dissipation factor. Multiple storage factors can be added only by taking the reciprocal of the sum of their reciprocals, in other words by first calculating dissipation factor. A good example of multiple dissipation factors is offered by a capacitor with a solid dielectric,[2] such as mica. Over a wide frequency range there are three kinds of losses, as shown in Figure 5. At low frequencies interfacial polarization produces a dissipation factor D_i, which decreases with increasing frequency in such manner that it results in a straight line with a slope less than 45° on a log-log plot of dissipation factor against frequency. Such a law would produce a very low dissipation factor at high frequencies. There is in addition a residual polarization, whose origin is not understood, which produces a minimum dissipation factor D_r, that is constant with frequency. At high frequencies ohmic resistance in the leads to the capacitor becomes an important source of loss, both because the reactance decreases with increasing frequency and because skin effect in the leads increases their resistance as the square root of the frequency. Hence, dissipation factor D_s from this source increases as the 3/2 power of frequency. Total dissipation factor is the sum of the three separate dissipation factors. Obviously, storage factor is useless in such a summation.

Storage factor Q has been used for inductors for a long time in connection with tuned circuits. In a tuned circuit in which a voltage e is introduced either through a series resistance as

[2] Field, R. F., "Frequency Characteristics of Decade Condensers," *General Radio Experimenter*, XVII, 5, October, 1942.

FIGURE 5. Component dissipation factors of a mica capacitor; D_i from interfacial polarization, D_r from residual polarization, and D_s from series resistance.

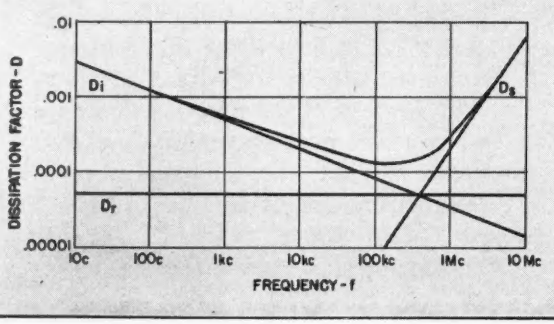

FIGURE 6. Circuit for measuring step-up voltage ratio.



shown in Figure 6, or inductively, the ratio of the voltage developed across the tuning capacitor to the input voltage is the storage factor Q of the circuit.

$$\frac{E}{e} = Q = \frac{\omega L}{R} = \frac{1}{R\omega C} \qquad (6)$$

If an air capacitor or a mica capacitor is used, the losses of the inductor are usually so much greater than those of the capacitor that it has become common practice to consider that this voltage step-up is the storage factor Q of the inductor. But even here there may be multiple losses. With care it is possible to design an air core inductor using insulated stranded wire (litzendraht) having a dissipation factor of 0.002 (Q = 500). A poor mica capacitor could easily have a dissipation factor of 0.001 (Q = 1000). Here is a 50% error if the voltage step-up is used. If both losses are considered, it is much faster to note that the total dissipation factor is 0.003 than to add the reciprocals of 500 and 1000 which, when it is done, amounts to first calculating dissipation factor.

Inductors furnish just as good an example of multiple dissipation factors as capacitors. In an iron-core coil there are three sources of loss[3], as shown in Figure 7. At low frequencies, the dissipation factor D_c produced by the ohmic resistance of the inductor varies inversely with frequency and is therefore a straight line sloping down at 45° on a log-log plot of dissipation factor against frequency. Hysteresis losses in the iron core provide a dissipation factor D_h which is constant with frequency and whose magnitude increases with flux density. Eddy current losses in the iron laminations increase with frequency and produce a dissipation factor D_e which increases directly with frequency. The total dissipation factor is the sum of the three separate dissipation factors. As noted under capacitors, it would only complicate matters to try to use storage factor Q.

Air-core inductors used near their resonant frequencies offer a different set of three losses. Ohmic resistance furnishes a dissipation factor D_c varying inversely with frequency as shown in Figure 8. There are eddy current losses in the copper winding which behave in the same manner as eddy current losses in iron and give a dissipation factor D_e which increases directly with frequency. Finally the distributed capacitance of the inductor has a dissipation factor D_0 of its own and determines, with the inductance of the coil, a natural frequency f_0. The dissipation factor D_f

[3] McElroy, P. K., and Field, R. F., "How Good is an Iron-Cored Coil?", *General Radio Experimenter*, XVI, 10, March, 1942.

FIGURE 7. Component dissipation factors of an iron-cored coil; D_c from ohmic resistance, D_h from hysteresis, and D_e from eddy currents.

FIGURE 8. Component dissipation factors of an air-cored coil; D_c from ohmic resistance, D_e from eddy currents, and D_f from distributed capacitance.

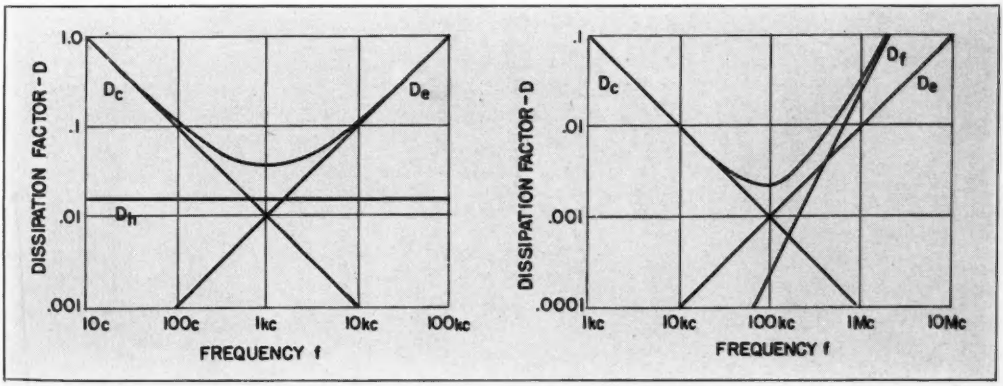

which this capacitance produces in the coil varies with the square of the frequency, having, of course, the value D_0 at f_0. Again this total dissipation factor is the sum of the three separate dissipation factors.

An even more complicated case is a multiple layer toroid with a low permeability dust core for use at high frequencies. There are five sources of loss, ohmic resistance, eddy currents in both iron and copper, hysteresis losses in the iron, and dielectric losses in the distributed capacitance.

It thus appears that in both the analysis and the synthesis of losses in capacitors and inductors, dissipation factor best expresses their losses. Since both capacitors and inductors are now used over very wide ranges of frequency, it is logical to use for all other calculations the factor in terms of which the losses are best expressed, namely dissipation factor D.

— ROBERT F. FIELD

NEW ADDRESS FOR WEST COAST OFFICE

● **IN ORDER** to take care of the increasing activity of our west-coast office, we are moving to larger quarters at 950 North Highland Avenue, Los Angeles 38, California, about two blocks west of our former location. The telephone number is Hollywood 6201.

The increased space and better facilities at the new address will enable Mr. Frederick Ireland, the engineer in charge, and his staff to handle the requirements of our west-coast customers with the same efficient service as in the past.

GENERAL RADIO COMPANY
275 MASSACHUSETTS AVENUE
CAMBRIDGE 39 MASSACHUSETTS
TELEPHONE: TROWBRIDGE 4400

BRANCH ENGINEERING OFFICES

NEW YORK 6, NEW YORK
90 WEST STREET
TEL.—WORTH 2-5837

CHICAGO 5, ILLINOIS
920 SOUTH MICHIGAN AVENUE
TEL.—WABASH 3820

LOS ANGELES 38, CALIFORNIA
950 NORTH HIGHLAND AVENUE
TEL.—HOLLYWOOD 6201

PRINTED IN U.S.A.

PRICE LIST

FOR

CATALOG K

FIRST, SECOND, THIRD AND FOURTH EDITIONS
AND
CATALOG SUPPLEMENT

THIS price list includes all instruments and components described in the four editions of Catalog K plus many newer items. We shall be glad to supply the Catalog Supplement describing any current items listed here that are not described in your copy of the catalog.

GENERAL RADIO COMPANY
CAMBRIDGE, MASS., U.S.A.

MANUFACTURERS OF RADIO AND ELECTRICAL LABORATORY APPARATUS

These prices are not in excess of any applicable ceiling prices established under the regulations of the Office of Price Administration.

Type	*Description*	*Price*
50-A	Variac	$116.00
	Brushes for 50-A . . . set	4.50
50-AG2	Two-Gang 50-A Variac	260.00
50-AG3	Three-Gang 50-A Variac	388.00
50-B	Variac	116.00
	Brushes for 50-B . . . set	4.50
50-BG2	Two-Gang 50-B Variac	260.00
50-BG3	Three-Gang 50-B Variac	388.00
50-P1	Choke	8.50
100-Q	Variac	46.00
100-321	Brushes for 100-Q . . . set	1.00
100-QG2	Two-Gang 100-Q Variac	98.50
100-QG3	Three-Gang 100-Q Variac	150.00
100-R	Variac	46.00
100-322	Brushes for 100-R . . . set	1.00
100-RG2	Two-Gang 100-R Variac	98.50
100-RG3	Three-Gang 100-R Variac	150.00

Type	*Description*	*Price*
106-G	Standard Inductance	$30.00
106-J	Standard Inductance	30.00
106-K	Standard Inductance	30.00
106-L	Standard Inductance	30.00
106-M	Standard Inductance	35.00
107-J	Variable Inductor	45.00
107-K	Variable Inductor	45.00
107-L	Variable Inductor	50.00
107-M	Variable Inductor	50.00
107-N	Variable Inductor	50.00
119-A	Radio-Frequency Choke	2.00
119-B	Radio-Frequency Choke	2.50
138-B	Switch Contact	.10
	Package of 10	.40
	Package of 100	2.50
138-C	Switch Contact	.10
	Package of 10	.60

Type	Description	Price
	Package of 100	$4.00
138-Q	Switch Stop	.10
	Package of 10	.40
	Package of 100	2.75
138-V	Binding Post	.25
	Package of 10	1.75
	Package of 100	15.00
138-VD	Binding Post	.25
	Package of 10	1.75
	Package of 100	15.00
138-X	Binding Post	.25
	Package of 10	1.75
	Package of 100	15.00
138-UL	Binding Post Assembly	.60
	Package of 10	4.50
200-B	Variac	11.50
200-315	Brush for 200-B	.50
200-CM	Variac	20.00
200-CMH	Variac	25.00
200-CU	Variac	16.50
200-350	Brush for 200-CU & CM	.25
200-CUH	Variac	21.50
200-352	Brush for 200-CUH & CMH	.25
200-CUG2	Two-Gang 200-CU Variac	42.00
200-CUHG2	Two-Gang 200-CUH Variac	51.50
200-CUG3	Three-Gang 200-CU Variac	65.00
200-CUHG3	Three-Gang 200-CUH Variac	78.00
202-A	Switch	1.00
202-B	Switch	1.00
202-Y	Switch Knob	.65
	Package of 10	4.00
202-Z	Switch Knob	.65
	Package of 10	4.00
214-A	Rheostat Potentiometer, 10Ω	2.50
214-A	Rheostat Potentiometer, 20Ω	2.50
214-A	Rheostat Potentiometer, 50Ω	2.50
214-A	Rheostat Potentiometer, 100Ω	2.50
214-A	Rheostat Potentiometer, 200Ω	2.50
214-A	Rheostat Potentiometer, 500Ω	2.50
214-A	Rheostat Potentiometer, 1kΩ	2.50
214-A	Rheostat Potentiometer, 2kΩ	2.50
214-A	Rheostat Potentiometer, 5kΩ	2.50
214-A	Rheostat Potentiometer, 10kΩ	2.50
219-K	Decade Condenser	110.00
219-M	Decade Condenser	60.00
249-H	Attenuation Box	135.00
249-T	Attenuation Box	115.00
274-D	Insulated Plug	.35
	Package of 10	2.75
274-J	Jack	.10
	Package of 10	.70
	Package of 100	4.50
274-M	Double Plug	.60
	Package of 10	5.00
274-NC	Shielded Conductor	2.00
274-ND	Shielded Plug	2.00
274-NE	Shielded Plug and Cable	5.00
274-P	Plug	.15
	Package of 10	1.25
	Package of 100	7.00
	1,000-1,999 per M	65.00
	2,000-19,999 per M	62.00
274-SB	Short Circuit Plug	.90
274-X	Plug	.10
	Package of 10	.60
	Package of 100	5.00
274-Y	Panel Terminal Insulator Assembly per pair	.25
	10 Pairs	1.50
274-Z	Panel Terminal Insulator Assembly per pair	.35
	10 pairs	2.50

Type	Description	Price
301-A	Rheostat-Potentiometer, 5Ω	$1.50
301-A	Rheostat-Potentiometer, 10Ω	1.50
301-A	Rheostat-Potentiometer, 20Ω	1.50
301-A	Rheostat-Potentiometer, 50Ω	1.50
301-A	Rheostat-Potentiometer, 100Ω	1.50
301-A	Rheostat-Potentiometer, 200Ω	1.50
301-A	Rheostat-Potentiometer, 500Ω	1.50
301-A	Rheostat-Potentiometer, 1kΩ	1.50
301-A	Rheostat-Potentiometer, 2kΩ	1.50
301-A	Rheostat-Potentiometer, 5kΩ	2.00
301-A	Rheostat-Potentiometer, 10kΩ	2.00
301-A	Rheostat-Potentiometer, 20Ω	2.00
314-A	Rheostat-Potentiometer, 1kΩ	5.00
314-A	Rheostat-Potentiometer, 2kΩ	5.00
314-A	Rheostat-Potentiometer, 5kΩ	5.00
314-A	Rheostat-Potentiometer, 10kΩ	5.00
314-A	Rheostat-Potentiometer, 20kΩ	5.00
314-A	Rheostat-Potentiometer, 50kΩ	5.00
314-A	Rheostat-Potentiometer, 100kΩ	5.00
318-B	Dial Plate	.60
318-C	Dial Plate	.40
339-A	Switch	3.00
339-AL	Switch	4.00
339-B	Switch	2.50
368-A	Variable Air Condenser	1.00
368-B	Variable Air Condenser	1.10
368-C	Variable Air Condenser	1.65
371-A	Rheostat-Potentiometer, 1kΩ	5.00
371-A	Rheostat-Potentiometer, 2kΩ	5.00
371-A	Rheostat-Potentiometer, 5kΩ	5.00
371-A	Rheostat-Potentiometer, 10kΩ	5.00
371-A	Rheostat-Potentiometer, 20kΩ	5.00
371-A	Rheostat-Potentiometer, 50kΩ	5.00
371-A	Rheostat-Potentiometer, 100kΩ	5.00
371-T	Rheostat-Potentiometer, 10kΩ	5.00
376-L	Quartz Plate	50.00
376-M	Quartz Plate	35.00
380-F	Decade-Condenser Unit	65.00
380-L	Decade-Condenser Unit	12.00
380-M	Decade-Condenser Unit	18.00
380-N	Decade-Condenser Unit	12.00
380-P3	Switch	7.50
471-A	Rheostat-Potentiometer, 10kΩ	7.00
471-A	Rheostat-Potentiometer, 20kΩ	7.00
471-A	Rheostat-Potentiometer, 50kΩ	7.00
471-A	Rheostat-Potentiometer, 100kΩ	7.00
471-A	Rheostat-Potentiometer, 200kΩ	7.00
480-P1	Panel	2.75
480-P2	Panel	3.75
480-P3	Panel	4.75
480-P4	Panel	5.75
483-F	Output Meter	65.00
500-A	Resistor	2.50
500-B	Resistor	2.50
500-C	Resistor	2.50
500-D	Resistor	2.50
500-E	Resistor	2.50
500-F	Resistor	2.50
500-G	Resistor	2.50
500-H	Resistor	2.50
500-J	Resistor	2.50
505-A	Condenser	4.50
505-B	Condenser	4.50
505-E	Condenser	4.50
505-F	Condenser	4.50
505-G	Condenser	4.50
505-K	Condenser	6.00
505-L	Condenser	7.00
505-M	Condenser	7.50
505-R	Condenser	8.00
505-T	Condenser	12.00
505-U	Condenser	16.00
505-X	Condenser	25.00

Type	Description	Price
509-F	Standard Condenser	$18.00
509-G	Standard Condenser	18.00
509-K	Standard Condenser	18.00
509-L	Standard Condenser	18.00
509-M	Standard Condenser	22.00
509-R	Standard Condenser	22.00
509-T	Standard Condenser	25.00
509-U	Standard Condenser	30.00
509-X	Standard Condenser	35.00
509-Y	Standard Condenser	55.00
510-A	Decade-Resistance Unit	10.00
510-B	Decade-Resistance Unit	10.00
510-C	Decade-Resistance Unit	10.00
510-D	Decade-Resistance Unit	12.50
510-E	Decade-Resistance Unit	15.00
510-F	Decade-Resistance Unit	17.50
510-G	Decade-Resistance Unit	40.00
510-P3	Switch	6.00
519-A	Dial Lens	2.50
520-A	Dial Lock	.75
522-A	Dial Plate	.40
530-A	Band-Pass Filter	35.00
539-B	Variable Air Condenser	25.00
539-K	Variable Air Condenser	12.50
544-B	Megohm Bridge (with a-c power supply	275.00
544-B	Megohm Bridge (battery operated)	205.00
544-P3	Power Supply	95.00
544-P10	Battery Power Supply	20.00
546-B	Microvolter	95.00
549-C	Synchronous-Motor Contactor	90.00
549-P2	Hand Contactor	35.00
561-D	Vacuum-Tube Bridge	430.00
566-A	Wavemeter	60.00
568-D	Variable Air Condenser	5.00
568-E	Variable Air Condenser	8.00
568-K	Variable Air Condenser	5.00
568-L	Variable Air Condenser	8.00
572-B	Microphone Hummer	12.50
578-A	Shielded Transformers	17.50
578-B	Shielded Transformers	17.50
578-C	Shielded Transformers	17.50
583-A	Output Power Meter	110.00
602-D	Decade-Resistance Box	30.00
602-F	Decade-Resistance Box	45.00
602-G	Decade-Resistance Box	45.00
602-J	Decade-Resistance Box	60.00
602-K	Decade-Resistance Box	55.00
602-L	Decade-Resistance Box	70.00
602-M	Decade-Resistance Box	80.00
602-N	Decade-Resistance Box	75.00
612-C	Coupling Panel (Sold only with complete assembly)	215.00
612-K	Coupling Panel (Sold only with complete assembly)	135.00
614-C	Selective Amplifier (Sold only with complete assembly)	300.00
616-D	Heterodyne Frequency Meter	675.00
	Calibration Chart	25.00
617-C	Interpolation Oscillator	575.00
619-E	Heterodyne Detector	410.00
620-AR	Heterodyne Frequency Meter and Calibrator	575.00
620-P1	Carrying Case, Metal	80.00
621-M	Power Stroboscope	3,075.00
631-B	Strobotac	115.00
631-P1	Strobotron	4.50
637-A	Fluted Knob	.35
	Package of 10	2.50
637-B	Fluted Knob	.50
	Package of 10	2.75
637-G	Fluted Knob	$0.50
	Package of 10	2.75
637-H	Fluted Knob	.40
	Package of 10	2.50
637-J	Fluted Knob	.45
	Package of 10	3.25
637-K	Fluted Knob	.45
	Package of 10	3.25
637-P	Fluted Knob	.55
	Package of 10	4.00
637-Q	Fluted Knob	.55
	Package of 10	4.00
637-R	Fluted Knob	.55
	Package of 10	4.00
637-S	Fluted Knob	.55
	Package of 10	4.00
648-P1	Replacement Lamp	17.50
648-A	Strobolux	175.00
650-P1	Power Supply & Amplifier	140.00
650-A	Impedance Bridge	220.00
651-AE	Oscillograph Recorder	500.00
651-AG	Camera Assembly	600.00
651-P5	Lens	150.00
654-A	Decade Voltage Divider	100.00
663-A,B,C,D,E,F,G	Resistor	7.00
667-A	Inductance Bridge	375.00
668-A	Compensated Decade-Resistance Unit	12.50
668-B	Compensated Decade Resistance Unit	15.00
668-C	Compensated Decade Resistance Unit	15.00
670-F	Compensated Decade Resistor	55.00
674-C	Jumbo Plug	.35
	Package of 10	1.90
674-D	Insulated Jumbo Plug	.75
	Package of 10	6.00
674-J	Jumbo Jack	.40
	Package of 10	2.00
674-P	Jumbo Plug	.40
	Package of 10	2.00
675-P	Piezo-Electric Oscillator (Sold only with complete assembly)	400.00
676-A	Quartz Bar	170.00
690-D, 691-C	Piezo Oscillator and Temperature Unit	800.00
692-B 100c	Multivibrator	150.00
692-B 1kc	Multivibrator	150.00
692-B 10kc	Multivibrator	150.00
692-B 50kc	Multivibrator	150.00
693-B	Syncronometer	560.00
694-C	Control Unit	140.00
695-C	Charging Equipment	375.00
696-C	Power Supply	240.00
698-A	Duplex Multivibrator	240.00
699-A	Comparison Oscilloscope (Sold only with complete assembly)	300.00
700-A	Wide-Range Beat-Frequency Oscillator	650.00
700-P1	Voltage Divider	50.00
701-A	Direct-Drive Dial	1.50
701-K	Direct-Drive Dial	1.50
702-A	Friction-Drive Dial	2.00
702-B	Friction-Drive Dial	2.00
702-F	Friction-Drive Dial	2.00
702-G	Friction-Drive Dial	2.00
703-A	Friction-Drive Dial	2.75
703-B	Friction-Drive Dial	2.75
703-F	Friction-Drive Dial	2.75
703-G	Friction-Drive Dial	2.75

Type	Description	Price
703-K	Friction-Drive Dial	$2.75
703-L	Friction-Drive Dial	2.75
704-C	Precision Dials	7.50
704-D	Precision Dials	7.50
705-A	Friction-Drive Dial	2.50
705-F	Friction-Drive Dial	2.50
706-C	Precision Dial	8.00
706-D	Precision Dial	8.00
707-A	Cathode-Ray Null Detector	250.00
707-P1	Phasing Unit	8.00
707-P2	Phasing Unit	8.00
707-P42	Amplifier Tuning Unit	30.00
707-P50	Amplifier Tuning Unit	30.00
707-P60	Amplifier Tuning Unit	30.00
707-P100	Amplifier Tuning Unit	30.00
707-P400	Amplifier Tuning Unit	30.00
707-P1000	Amplifier Tuning Unit	30.00
707-P2000	Amplifier Tuning Unit	30.00
710-A	Direct-Drive Dial	1.50
710-B	Direct-Drive Dial	1.50
710-F	Direct-Drive Dial	1.50
710-G	Direct-Drive Dial	1.50
712-A	Direct-Drive Dial	2.00
712-F	Direct-Drive Dial	2.00
715-AM	Direct-Current Amplifier	275.00
715-AE	Direct-Current Amplifier	315.00
716-CM	Capacitance Bridge	450.00
716-CR	Capacitance Bridge	410.00
717-A	Direct-Drive Dial	2.25
717-B	Direct-Drive Dial	2.25
717-F	Direct-Drive Dial	2.25
717-G	Direct-Drive Dial	2.25
717-K	Direct-Drive Dial	2.25
717-L	Direct-Drive Dial	2.25
720-A	Heterodyne Frequency Meter	290.00
722-D	Precision Condenser	135.00
	Worm Correction Data	65.00
722-F	Precision Condenser	105.00
	Worm Correction Data	45.00
722-M	Precision Condenser	125.00
	Worm Correction Data	45.00
722-N	Precision Condenser	175.00
	Worm Correction Data	45.00
722-F and M	Quartz Insulation	55.00
722-D	Quartz Insulation	75.00
723-A	Vacuum-Tube Fork	85.00
723-B	Vacuum-Tube Fork	85.00
723-C	Vacuum-Tube Fork	110.00
723-D	Vacuum-Tube Fork	110.00
723-P1	Power Supply	25.00
724-A	Precision Wavemeter	230.00
726-A	Vacuum-Tube Voltmeter	165.00
726-P1	Multiplier	15.00
727-A	Vacuum-Tube Voltmeter	125.00
728-A	Vacuum-Tube Voltmeter	125.00
729-A	Megohmmeter	95.00
736-A	Wave Analyzer	720.00
740-B	Capacitance Test Bridge	175.00
740-BG	Capacitance Test Bridge	195.00
758-A	Wavemeter	35.00
759-B	Sound Level Meter	260.00
	Replacement Battery	3.50
759-P21	Tripod and Extension Cable	20.00
759-P35	Vibration Pickup	40.00
759-P36	Control Box	45.00
1261-A	Power Supply	70.00

Type	Description	Price
760-A	Sound Analyzer	$330.00
	Replacement Battery	7.10
761-A	Vibration Meter	320.00
	Replacement Battery	3.50
762-B	Vibration Analyzer	375.00
774-E	Cable Plug	1.50
774-F	Plug Connector	1.75
774-G	Panel Plug	1.75
774-M	Cable Jack	1.50
774-N	Jack Connector	1.75
774-P	Panel Jack	1.75
774-R1	Patch Cords	5.00
774-R2	Patch Cords	5.00
774-X	Insertion Unit	6.00
774-YB	Terminal Unit	5.50
783-A	Output-Power Meter	235.00
805-C	Standard-Signal Generator	1,225.00
813-A	Audio Oscillator	40.00
1231-P2	Tuned Circuit	17.50
1231-P3	Tuned Circuit	12.00
815-A	Precision Fork	175.00
815-B	Precision Fork	185.00
815-C	Precision Fork	185.00
815-P1	Transformer	6.95
816-A	Vacuum-Tube Precision Fork	485.00
816-B	Vacuum-Tube Precision Fork	485.00
821-A	Twin-T Impedance Measuring Network	390.00
830-A	Wave Filter	22.50
830-B	Wave Filter	22.50
830-C	Wave Filter	22.50
830-D	Wave Filter	22.50
830-E	Wave Filter	22.50
830-F	Wave Filter	22.50
830-G	Wave Filter	30.00
830-H	Wave Filter	30.00
830-R	Wave Filter	27.50
857-A	UHF Oscillator	290.00
869-A	Pulse Generator	300.00
913-B	Beat-Frequency Oscillator	375.00
916-A	Radio-Frequency Bridge	400.00
1140-A	UHF Wavemeter	65.00
1175-A	Frequency Monitor	285.00
1176-A	Frequency Meter	230.00
1181-A	Frequency Deviation Monitor	615.00
1231-A	Amplifier & Null Detector	160.00
1260-A	Variac-Rectifier	115.00
1261-A	Power Supply	70.00
1530-A	Microflash	550.00
1530-P1	Replacement Lamp	20.00
1614-A	Capacitance Bridge	105.00
1631-A	Inductance Bridge	115.00
1802-A	Crystal Galvanometer	175.00
1861-A	Megohmmeter (Identical with Type 487-B)	120.00
1931-A	Modulation Monitor	295.00
1932-A	Distortion & Noise Meter	450.00
C-21-HLD	Primary Frequency Standard, a-c operated	2,950.00
C-21-HLD	Primary Frequency Standard, battery operated	3,085.00
Measuring	Equipment for C-21-HLD	2,750.00
C-10-H	Secondard Frequency Standard	965.00
Secondary	Frequency Standard with Measuring Equipment	2,230.00